




15+ YEARS experience

Independent Innovation LED Lighting Manufacturer


Responsibility, Honesty, Service and Value.
Listed Company
Quality Defender



©2010-2025 ShineLong Technology. All rights reserved.

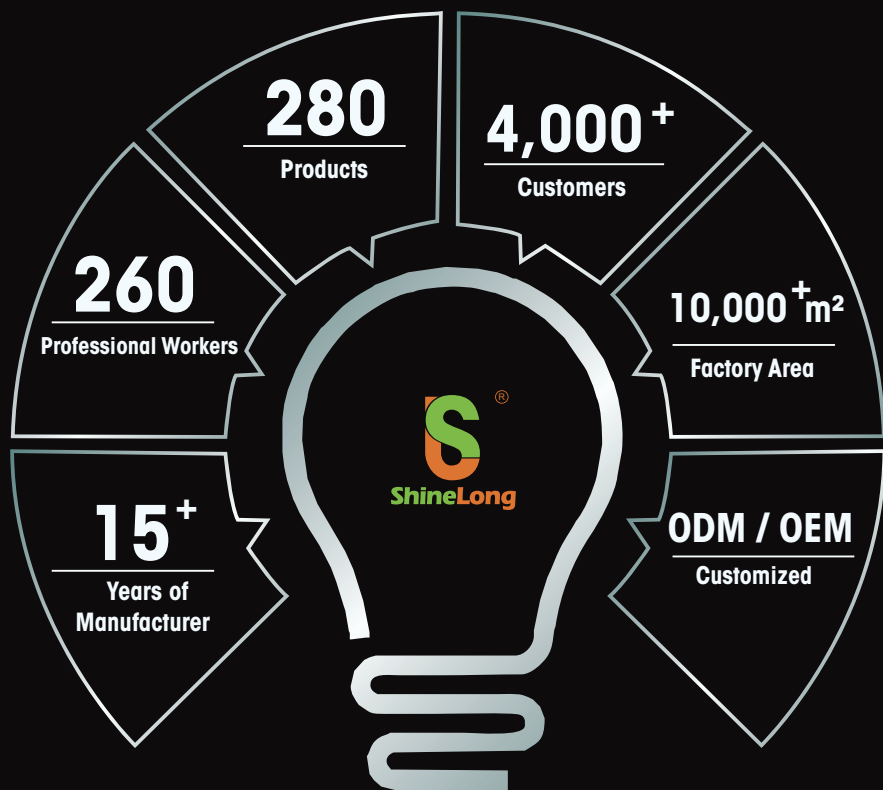

TIMELINE
HISTORICAL BACKGROUND

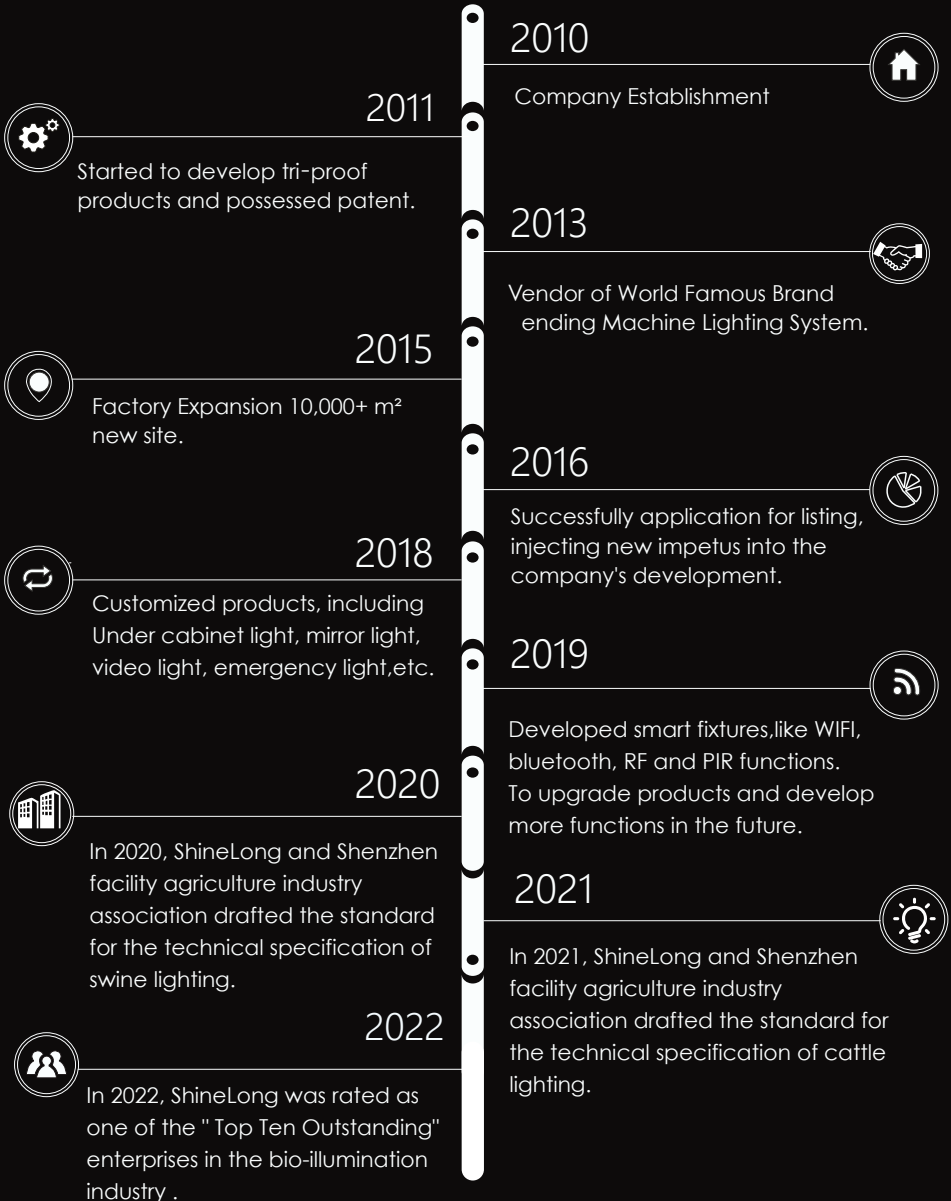

Products Catalog

LED TRI-PROOF LIGHT

Parkade EU&AU	04
Parkade US	05
Rancher IP69K	06
Eco-Rancher IP69K	07
Eco-Rancher Plastic	08
Rancher IP69K Tri-proof Light.....	09
Rancher Mini	10
Rancher Eco Mini	11
Gauls	12
Alpha	13
Eco Alpha	14
Eco Mini II	15
Utilee PC IP65 Tri-proof Light	16

LED PANEL LIGHT

Slice Panel Light	17
Internal Panel Light	18
CCT Internal Driver Panel Light	19
Smart Internal Driver LED Panel Light	20
Slim LED Panel Light	21
Back-lit Panel Light	22
Advertising Panel Light	23
Disc Round Panel Light	24
LED Round Light	25

Commercial Lighting

LED Batten Light	26
LED Slimbay Light	27
Single Slimbay Light	28

K-lens Linear Light	29
Mega High Bay	30
Single High Bay	31
Security Light	32
Reflex LED Indirect Light	33
Seam LED Linear Light	34
Eco Seam LED Linear Light	35
Smart Multicolour LED Tube Light	36
Protac Explosion-proof Light	37

LED TUBE

Expert T8 LED Tube	38
Expert T8 LED Tube(CE)	39
Expert T6 LED Tube	40
T5 Batten Light	41

Outdoor Lighting

Eco UFO Highbay Light.....	42
IP66 LED Flood Light	43
IP66 LED Street Light.....	44
Arealux Stadium Light	45
High Power IP65 LED Flood Light.....	46


Control System

Smart Control System	47
----------------------------	----

Parkade^{EU&AU} Garage Lights

Linkable / tool-free
Up to 150lm/w
94V0 materials
L80B10=89000hrs
Aluminum casing + PC cover

IP66 IK10

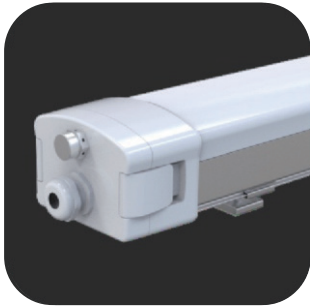

SL-A65X2-20-X

20 Watts 600*94*69mm
130 lm/w 2600lm
150 lm/w 3000lm



SL-A65X2-30-X

30 Watts 600*94*69mm
130lm/w 3600lm
150lm/w 4500lm



SL-A65X4-40-X

40 Watts 1200*94*69mm
130lm/w 5200lm
150lm/w 6000lm

SL-A65X4-50-X

50 Watts 1200*94*69mm
130lm/w 6500lm
150lm/w 7500lm

SL-A65X5-50-X

50 Watts 1500*94*69mm
130lm/w 6500lm
150lm/w 7500lm

SL-A65X5-60-X

60 Watts 1500*94*69mm
130lm/w 7800lm
150lm/w 9000lm

SL-A65X6-80-X

80 Watts 1800*94*69mm
130lm/w 10400lm
150lm/w 12000lm

SL-A65X8-80-X

80 Watts 2400*94*69mm
130lm/w 10400lm
150lm/w 12000lm

SL-A65X10-100-X

100 Watts 3000*94*69mm
130lm/w 13000lm
150lm/w 15000lm





Parkade US

Vapor Tight Light

DLC 5.1 premium
 94V0 materials
 L80B10=89000hrs
 3/4"/1/2" connector options
 Single/ Linkbale / Rear connection



IP66 IK10

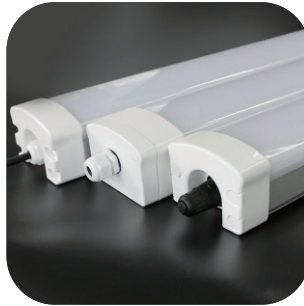

SL-A65X2-20-X

20 Watts 600*94*69mm/2Ft
 130 lm/w 2600lm
 150 lm/w 3000lm

SL-A65X2-30-X

30 Watts 600*94*69mm/2Ft
 130lm/w 3600lm
 150lm/w 4500lm

SL-A65X4-40-X

40 Watts 1200*94*69mm/4Ft
 130lm/w 5200lm
 150lm/w 6000lm

SL-A65X4-50-X

50 Watts 1200*94*69mm/4Ft
 130lm/w 6500lm
 150lm/w 7500lm

SL-A65X4-60-X

60 Watts 1200*94*69mm/4Ft
 130lm/w 7800lm
 150lm/w 9000lm

SL-A65X8-80-X

80 Watts 2400*94*69mm/8Ft
 130lm/w 10400lm
 150lm/w 12000lm

SL-A65X8-100-X

100 Watts 2400*94*69mm/8Ft
 130lm/w 13000lm
 150lm/w 15000lm



Rancher IP69K

LED Poultry Light

Anti-corrosion & Anti-UV
 No water condensation
 S316 Components
 Suitable for outdoor or indoor
 Waterjet clean
 850 °C glow wire test
 L80B10(Ta=25°C)>50,000hrs



IP69K IK10



SL-P69X2-20-X PC/PMMA

20 Watts 600*Ø75mm/2Ft
 130/135 lm/w 2600/2700 lm
 145/150 lm/w 2900/3000 lm

SL-P69X2-30-X PC

30 Watts 600*Ø75mm/2Ft
 130 lm/w 3900 lm
 145 lm/w 4350 lm

SL-P69X4-36-X PC/PMMA

36 Watts 1200*Ø75mm/4Ft
 130/135 lm/w 4600/4860 lm
 145/150 lm/w 5220/5400 lm

SL-P69X4-50-X PC

50 Watts 1200*Ø75mm/4Ft
 130 lm/w 6500 lm
 145 lm/w 7250 lm

SL-P69X5-45-X PC/PMMA

45 Watts 1500*Ø75mm/5Ft
 130/135 lm/w 5850/6075 lm
 145/150 lm/w 6525/6750 lm

SL-P69X5-50-X PC

50 Watts 1500*Ø75mm/5Ft
 130 lm/w 6500 lm
 145 lm/w 7250 lm

SL-P69X5-60-X PC

60 Watts 1500*Ø75mm/5Ft
 130 lm/w 7800 lm
 145 lm/w 8700 lm




Eco-Rancher IP69K LED Poultry Light

Anti - yellowing, no dark area, non-cracking
 No water condensation
 S316 Components
 Suitable for Indoor only
 Full PC Housing
 850 °C glow wire test
 L80B10(Ta=25 °C)>50,000hrs



IP69K IK10

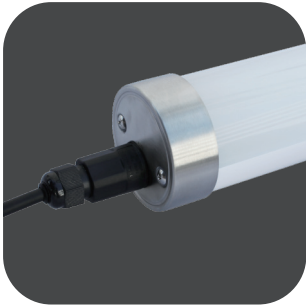

SL-P69X2-20-X-C

20 Watts 600*Ø75mm/2FT
 130 lm/w 2600lm
 145 lm/w 2900 lm

SL-P69X4-36-X-C

36 Watts 1200*Ø75mm/4FT
 130 lm/w 4680 lm
 145 lm/w 5220 lm

SL-P69X5-45-X-C

45 Watts 1500*Ø75mm/5FT
 130 lm/w 5850 lm
 145 lm/w 6525 lm



Rancher IP69K Tri-proof Light




Anti-UV, 850°C glow wire test
 Material: Full PC Housing + Clear cover
 With Aluminum Rebreather
 Linkable, S316 components
 L80B10(Ta=25°C)>50,000hrs
 High Efficacy: 130lm/w ±10% (UGR<12)
 or 145lm/w ±10% (UGR<22)



SL-P69X2-20-X
 20 Watts 600*Ø75mm/2Ft
 130 lm/w 2600lm
 145 lm/w 2900 lm



SL-P69X4-36-X
 36 Watts 1200*Ø75mm/4Ft
 130 lm/w 4700 lm
 145 lm/w 5250 lm

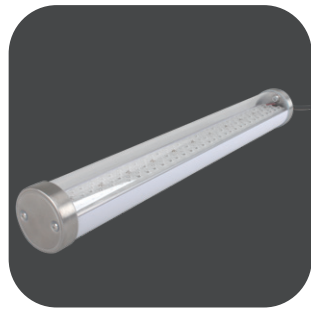

SL-P69X5-45-X
 45 Watts 1500*Ø75mm/5Ft
 130 lm/w 5850 lm
 145 lm/w 6525 lm

SL-P69X2-30-X
 30 Watts 600*Ø75mm/2Ft
 130 lm/w 3900lm
 145 lm/w 4350 lm

SL-P69X4-50-X
 50 Watts 1200*Ø75mm/4Ft
 130 lm/w 6500lm
 145 lm/w 7250 lm

SL-P69X5-50-X
 50 Watts 1500*Ø75mm/5Ft
 130 lm/w 6500lm
 145 lm/w 7250 lm


SL-P69X5-60-X
 60 Watts 1500*Ø75mm/5Ft
 130 lm/w 7800lm
 145 lm/w 8700 lm



Eco-Rancher Plastic IP69K Tri-proof Light

Dial code conversion power
 Dial code tone change color temperature
 Anti-yellowing / Non-Cracking
 S316 Components
 Linkable, Cost-effective, Tool free

IP69K IK09

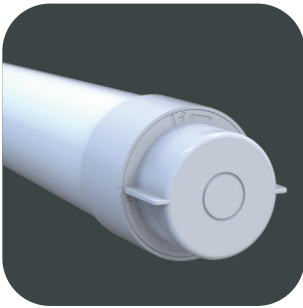

SL-P66X2-20-X-D

20 Watts 600*Ø75mm
 130lm/w 2600lm
 140lm/w 2800lm



SL-P66X4-35-X-D

35 Watts 1200*Ø75mm
 130lm/w 4550lm
 140lm/w 4900lm



SL-P66X5-45-X-D

45 Watts 1500*Ø75mm
 130lm/w 5850lm
 140lm/w 6300lm

• CCT setting(Option)

	1	2	
I	ON		3000K
	ON	ON	4000K
III		ON	5000K

• Power setting(Option)

	4	5	6	
ON	-	-	-	20W
-	-	ON	-	18W
-	ON	-	ON	15W
ON	-	ON	ON	12W

600mm

	3	4	5	6	
ON	-	-	-	-	35W
-	-	ON	-	-	30W
-	ON	-	ON	-	25W
ON	-	ON	ON	ON	20W

1200mm

	3	4	5	6	
ON	-	-	-	-	45W
-	-	ON	-	-	40W
-	ON	-	ON	-	34W
ON	-	ON	ON	ON	27W

1500mm



Rancher-Mini LED Tri-proof Light

Smaller Diameter 40mm
No water condensation
Linkable, S316 components
With Aluminum Rebreather
PC material-UV Resistance
L80B10(Ta=25°C)>50,000hrs



SL-C40AF2-10-X

10 Watts 600*Ø40mm/2Ft
120lm/w 1200lm
135lm/w 1350lm



SL-C40AF4-20-X

20Watts 1200*Ø40mm/4Ft
120lm/w 2400lm
135lm/w 2700lm



SL-C40AF5-30-X

30 Watts 1500*Ø40mm/5Ft
120lm/w 3600lm
135lm/w 4050lm



Rancher Eco-mini Tri-proof Light

IP66 & IK09 Grading
 High cost-effective
 Innovate installation method
 L80B10(Ta=25°C) > 50,000hrs



SL-C40AF2-10-XE

10 Watts	600*Ø40mm/2Ft
120lm/w	1200lm
135lm/w	1350lm



SL-C40AF4-20-XE

20Watts	1200*Ø40mm/4Ft
120lm/w	2400lm
135lm/w	2700lm



SL-C40AF5-30-XE

30 Watts	1500*Ø40mm/5Ft
120lm/w	3600lm
135lm/w	4050lm



Gauls

IP68 Tubular Light

Chemical / UV resistance
 S304 / S316 Components
 Linkable installation
 L80B10(Ta=25°C)>50,000hrs



IP68

IK10




SL-P68X2-20-X

20 Watts	600*Ø100mm/2Ft
120lm/w	2400lm
135lm/w	2700lm



SL-P68X2-30-X

30 Watts	600*Ø100mm/2Ft
120lm/w	3600lm
135lm/w	4050lm



SL-P68X4-40-X

40 Watts	1200*Ø100mm/4Ft
120lm/w	4800lm
135lm/w	5400lm

SL-P68X4-50-X

50 Watts	1200*Ø100mm/4Ft
120lm/w	6000lm
135lm/w	6750lm

SL-P68X5-50-X

50 Watts	1500*Ø100mm/5Ft
120lm/w	6000lm
135lm/w	6750lm

SL-P68X5-60-X

60 Watts	1500*Ø100mm/5Ft
120lm/w	7200lm
135lm/w	8100lm



Alpha Vapor Tight Light

Full PC housing, S304 clips
Anti-yellowing / Non-Cracking
No dark area, No sulfur seal
L80B10(Ta=25°C)>50,000hrs
Retrofit to 2x36w, 2x58w fluo fitting



IP65 IK09



SL-P65X4-40-X

40 Watts	1270*125*95mm/4Ft
120lm/w	4800lm
140lm/w	5600lm



SL-P65X5-50-X

50 Watts	1570*125*95mm/5Ft
120lm/w	6000lm
140lm/w	7000lm



SL-P65X4-50-X

50 Watts	1270*125*95mm/4Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X5-60-X

60 Watts	1570*125*95mm/5Ft
120lm/w	7200lm
140lm/w	7400lm



Eco Alpha

Vapor Tight Light

Cost-effective
 Full PC housing, S304 clips
 Anti-yellowing / Non-Cracking
 No dark area, No sulfur seal
 Retrofit to 1x36w, 2x36w 2x58w fluo fitting



SL-P65X4-20-X

20 Watts	1200*100*75mm/4Ft
120lm/w	2400lm
140lm/w	2800lm



SL-P65X4-40-X

40 Watts	1200*100*75mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-40-X

40 Watts	1500*100*75mm/5Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-60-X


60 Watts	1500*100*75mm/5Ft
120lm/w	7200lm
140lm/w	7400lm




EcoMini II

PC Tri-proof Light

Linkable/tool-free
 Anti -yellowing / Non-cracking
 High cost-effectiveness, Linkable, Tool free
 Dial code conversion power
 Dial code tone change color temperature

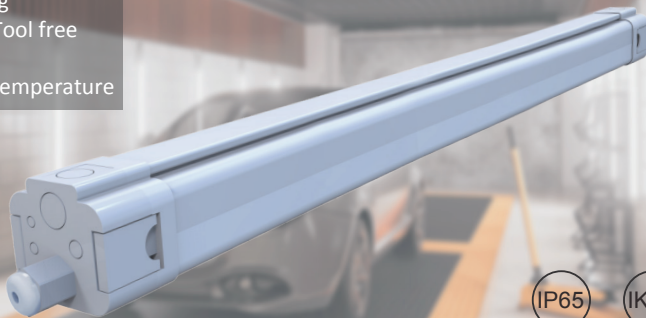


IP65 IK09

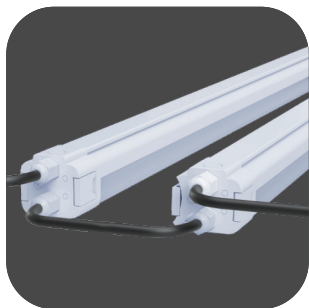


SL-M65X2-20-X-D

20 Watts 578*73*70mm
 130lm/w 2600lm
 140lm/w 2800lm

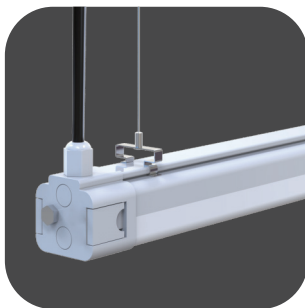

SL-M65X4-35-X-D

35 Watts 1178*73*70mm
 130lm/w 4550lm
 140lm/w 4900lm



SL-M65X5-45-X-D

45 Watts 1478*73*70mm
 130lm/w 5850lm
 140lm/w 6300lm

• CCT setting(Optional)

	1	2	
I	ON		3000K
	ON	ON	4000K
III		ON	5000K

• Power setting(Optional)

	4	5	6	
ON	-	-	-	20W
-	-	ON	-	18W
-	ON	-	ON	15W
ON	-	ON	ON	12W

578mm

	3	4	5	6	
ON	-	-	-	-	35W
-	-	ON	-	-	30W
-	ON	-	ON	-	25W
ON	-	ON	ON	ON	20W

1178mm

	3	4	5	6	
ON	-	-	-	-	45W
-	-	ON	-	-	40W
-	ON	-	ON	-	34W
ON	-	ON	ON	ON	27W


1478mm



Utilee

PC IP65 Tri-proof Light

Linkable, Tool free
Super cost-effective
High Efficacy: 120-150lm/w
High efficiency internal driver
Detachable end cap with quick connector

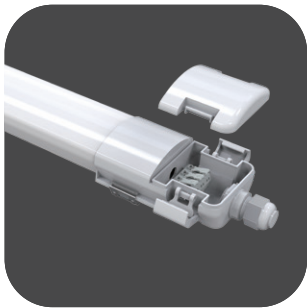

SL-P65X2-20-X-D

20 Watts	600*75*43mm
120lm/w	2400lm
150lm/w	3000lm



SL-P65X4-30-X-D

30 Watts	1200*75*43mm
120lm/w	3600lm
150lm/w	4500lm



SL-P65X5-40-X-D

40 Watts	1500*75*43mm
120lm/w	4800lm
150lm/w	6000lm



Slice Panel Light

Edge-lit, No dark area
 PMMA LGP, anti-yellowing
 UGR<19 /SDCM<3
 850°C Glow wire Test
 L80B10(Ta=25°C)>50,000hrs



SL-P1112-X-18A

12 Watts 295*295mm
 95lm/w 1140lm

SL-P1125-X-18A

25 Watts 295*295mm
 95lm/w 2375lm

SL-P1440-X-18A

40 Watts
 295*1195mm/302*1211mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2240-X-18A

40 Watts
 595*595mm/602*602mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2250-X-18A

50 Watts 595*595mm
 100lm/w 5000lm
 125lm/w 6250lm

SL-P2240-X-18A2

40 Watts 620*620mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2250-X-A-18A2

50 Watts 620*620mm
 100lm/w 5000lm
 125lm/w 6250lm


SL-P2460-X-18A

60 Watts
 595*1195mm/602*1211mm
 100lm/w 6000lm
 125lm/w 7500lm



Internal Panel Light

23.5mm thickness, Internal driver
 PMMA LGP, Anti-yellowing
 Direct Surface Mounted
 UGR<19 /SDCM<3
 L80B10(Ta=25°C)>50,000hrs



SL-P1120-X-28A

20 Watts 295*295mm/1*1ft
 100lm/w 1800lm



SL-P2240-X-28A

40 Watts 595*595mm/2*2ft
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2240-X-A-28A2

40 Watts 620*620mm/2*2ft
 100lm/w 4000lm
 125lm/w 5000lm


SL-P1440-X-28A

40 Watts 295*1195mm/1*4ft
 100lm/w 4000lm
 125lm/w 5000lm



CCT Internal Driver LED Panel Light

Integrated internal flicker free driver
 Support Triac dimming + Switch 3 CCT adjustment
 Support Wifi+ Bluetooth, Tuya controller
 Efficacy: 100lm/w , Up to 125lm/w
 High-quality Aluminum +PMMA LGP
 Surface mounting without frame




SL-P2240-X-28D

40 Watts	595*595*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P1440-X-28D

40 Watts	295*1195*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P2240-X-28D2

40 Watts	620*620*16mm
100lm/w	4000lm
125lm/w	5000lm



Smart Internal Driver LED Panel Light

Instant on/off, edge-lit, no dark area, anti-yellowing


Support On/Off switch 5 CCT adjustment + Ambient light

Support CCT adjustment + RGB Ambient light (Wifi + Bluetooth, APP controller)



SL-P2240-X-28E

35+5 Watts 612*612*32mm
100lm/w 4000lm



SL-P1440-X-28E

35+5 Watts 312*1222*32mm
100lm/w 4000lm



SL-P2450-X-28E

45+5 Watts 612*1222*32mm
100lm/w 5000lm





Slim LED Panel Light

SUPER Slim design
 Economical and Saving freight cost
 CRI>80, Up to 130lm/w
 IP54 Protection
 High power factor: >0.90
 Flicker free driver



SL-P1112-X-26B

12 Watts	295*295*7mm
100lm/w	1200lm
120lm/w	1440lm



SL-P1225-X-26B

25 Watts	295*595*7mm
100lm/w	2500lm
120lm/w	3000lm



SL-P2240-X-26B

40 Watts	595*595*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2240-X-26B2

40 Watts	620*620*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P1440-X-26B

40 Watts	295*1195*7mm
100lm/w	4000lm
130lm/w	5200lm


SL-P2460-X-26B

60 Watts	595*1195*7mm
100lm/w	6000lm
130lm/w	7800lm



Backlit LED Panel Light

One-time stretching process
 Slim Design, UGR<19
 CRI>80, Up to 140lm/w
 Material: High-quality Aluminum



SL-P1225-X-38B

30 Watts	295*1195*33mm
120lm/w	3600lm
140lm/w	4200lm

SL-P1440-X-38B

40 Watts	295*595*33mm
120lm/w	4800lm
140lm/w	5600lm

SL-P2240-X-38B

40 Watts	595*1195*33mm
120lm/w	4800lm
140lm/w	5600lm

SL-P2450-X-38B

50 Watts	1195*595*33mm
120lm/w	6000lm
140lm/w	7000lm



Advertising Panel Light

Lightbox thickness 16mm, ultra thin
 Four-side open, quick replacement for posters
 Customized sizes available
 PMMA LGP high light transmission plate
 100lm/w
 L80B10 Lifespan of 50,000 Hours (@Ta= 25°C)



SL-P1115-X-36A

15 Watts 450*410mm
 100lm/w 1500lm



SL-P2330-X-36A

30 Watts 890*410mm
 100lm/w 3000lm



Disc

Round Panel Light

Ultra thin disc design
PMMA LGP , anti-yellowing
Edge-lit, No dark area



SL-D12005-X 4"

5 Watts	Ø120mm
Cut Size	Ø100mm
70lm/w	350lm



SL-D18010-X 6"

10 Watts	Ø180mm
Cut Size	Ø165mm
80lm/w	800lm



SL-D24015-X 8"

15 Watts	Ø240mm
Cut Size	Ø225mm
80lm/w	1100lm

SL-D30020-X 12"

20 Watts	Ø300mm
Cut Size	Ø285mm
90lm/w	1800lm





LED Round Light

Ultra 38mm slim style fashion Patent design
Aluminum+PMMA cover with white & black color for choice
Flicker free internal driver with Non-dim, Triac and WIFI dimming



SL-RL0810-X(CWW)-BX
Size: Ø203mm (8 inch)
Power: 10W, 830~900lm



SL-RL1215-X(CWW)-BX
Size: Ø305mm (12 inch)
Power: 15W, 1300~1550lm



SL-RL1620-X(CWW)-BX
Size: Ø406mm (16 inch)
Power: 20W, 1650~1800lm



LED Batten Light

IP40, IK09, AL housing + PC cover, anti-yellowing
 125lm/w , up to 150lm/w
 Flicker free internal driver
 Function: Standard / emergency / sensor/ dimming
 Split structure, easy to install
 L80B10(Ta=25°C)>50,000hrs



SL-BTAX2-10-X

10 watts 600*67*70mm
 125lm/w 1250lm
 150lm/w 1650lm



SL-BTAX4-20-X


20 watts 1200*67*70mm
 125lm/w 2500lm
 150lm/w 3000lm



SL-BTAX5-30-X

30 watts 1500*67*70mm
 125lm/w 3750lm
 150lm/w 4500lm



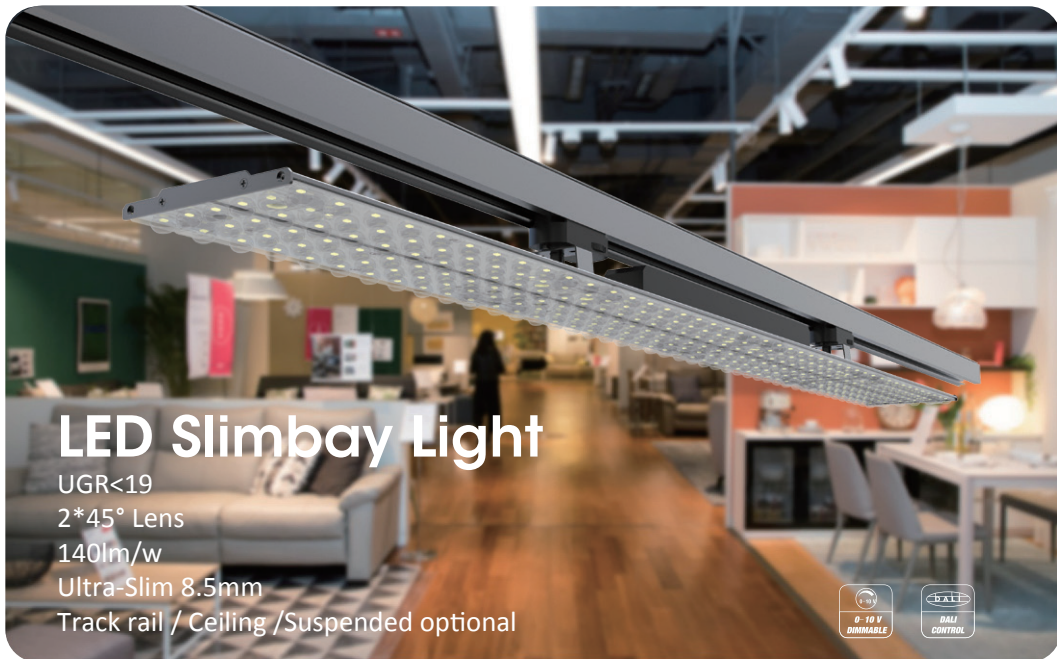

LED Slimbay Light

UGR<19

2*45° Lens

140lm/w

Ultra-Slim 8.5mm


Track rail / Ceiling /Suspended optional



SL-B40X2-40-X

40 Watts
140lm/w

584*125*13mm
5600lm

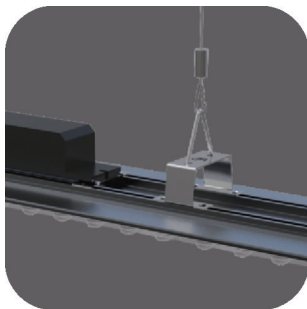

SL-B40X4-60-X

60 Watts
140lm/w

1164*125*13mm
8400lm




SL-B40X5-75-X

75 Watts
140lm/w

1454*125*13mm
10500lm



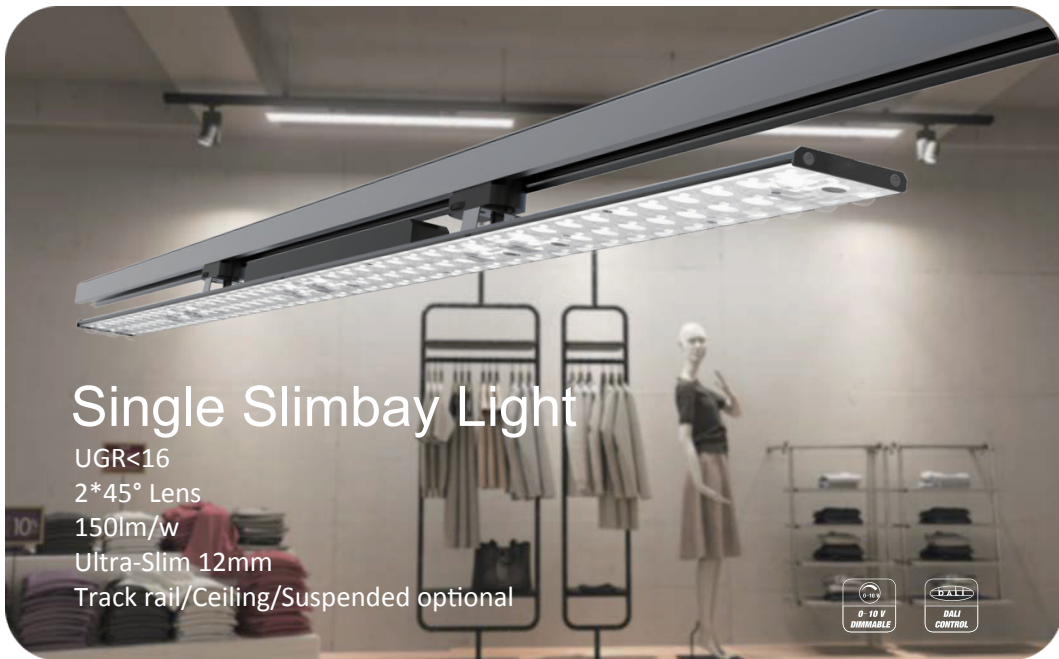

Single Slimbay Light

UGR<16

2*45° Lens

150lm/w

Ultra-Slim 12mm

Track rail/Ceiling/Suspended optional



SL-B40X2-20-XXB

20 Watts

585*61*12mm

150lm/w

3000lm



SL-B40X4-40-XXB

40 Watts

1165*61*12mm

150lm/w

6000lm



SL-B40X5-50-XXB

50 Watts

1455*61*12mm

150lm/w


7500lm



K-Lens

Linkable Linear Light

Instant-Seamless connection
 Replaceable driver easily
 Asymmetric & Symmetric lens



SL-A40X2-20-X

20 Watts 584*69*47mm/2Ft
 140lm/w 2800lm



SL-A40X4-36-X

36 Watts 1166*69*47mm/4Ft
 140lm/w 5000lm



SL-A40X5-45-X

45 Watts 1457*69*47mm/5Ft
 140lm/w 6300lm





Mega High Bay

Adjustable angle
 Flexible installation way
 6-12m height applications
 0-10V/ PWM dimmable available




SL-MH42X2-100-X

100 Watts	600*289*103mm/2FT
120lm/w	12000lm
150lm/w	15000lm



SL-MH42X3-120-X

150 Watts	900*289*103mm/3FT
120lm/w	15600lm
150lm/w	18000lm



SL-MH42X4-150-X



200 Watts	1200*289*103mm/4FT
120lm/w	18000lm
150lm/w	22500lm





Single High Bay

Wide viewing angle
 Patent fashion design
 Black/ White housing optional
 0-10V/PWM dimmable available



SL-SH42X2-80-X

80 Watts 600*185*96mm/2FT
 120lm/w 9600lm
 150lm/w 12000lm

SL-SH42X3-120-X

120 Watts 900*185*96mm/3FT
 120lm/w 14400lm
 150lm/w 18000lm

SL-SH42X4-150-X

150 Watts 1200*185*96mm/4FT
 120lm/w 18000lm
 150lm/w 22500lm





Security Lighting

Intrusion SMS reminding+ buzzer alarm
 IR induction & light control
 App control by cellphone
 The man-machine Interphone
 1080P HD Camera



SL-S1-12-X

12 Watts 200*100*138mm
 100lm/w 1200lm



SL-S2-12-X


12 Watts 200*165*128mm
 100lm/w 1200lm





Reflex LED Indirect Light

Indirect Lighting, No Spot or Glare
 UGR<19, No flicker driver
 CCT & power tunable
 L80B10(Ta=25 C)>50,000hrs

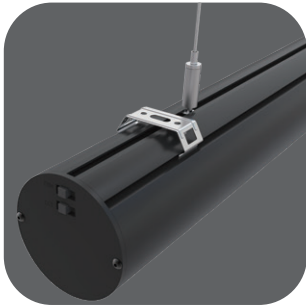

SL-LD70X2-20-X

20 Watts 562*Ø70mm
 100lm/w 2000lm



SL-LD70X4-36-X

36 Watts 1118*Ø70mm
 100lm/w 3600lm



SL-LD70X5-45-X

45 Watts 1397*Ø70mm
 100lm/w 4500lm

■ 562mm

DIP Switch			
Power(±10%)	10W	15W	20W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1118mm

DIP Switch			
Power(±10%)	25W	30W	36W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1397mm

DIP Switch			
Power(±10%)	35W	40W	45W
DIP Switch			
CCT	3000K	4000K	5000K





Seam LED Linear Light

DIP switch power(0.6m: 15w/18w/20w, 1.2m: 25w/32w/40w, 2.4m: 52w/63w/80w)

DIP switch CCT: (3000K/4000K/5000K or 4000K/5000K/6000K)


Instant seamless connection

Light Direction: Light up and down / Light down


High Efficacy: 120lm/w \pm 10%, up to 130lm/w \pm 10%

Suspended / Surface Mount / Wall mount installation

Material: Black painted 6063# Aluminum housing (White painted optional)




Instant seamless connection

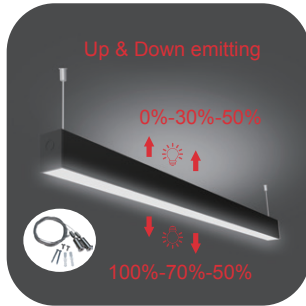

Up & Down emitting

0%-30%-50%

100%-70%-50%

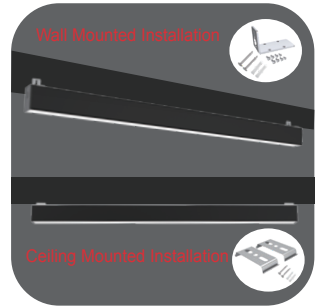

Wall Mounted Installation

Ceiling Mounted Installation

SL-LS50AX2-20-X

20 Watts	600*50*70mm
120lm/w	2400lm
130lm/w	2600lm

SL-LS50AX4-40-X

40 Watts	1200*50*70mm
120lm/w	4800lm
130lm/w	5200lm

SL-LS50AX8-80-X

80 Watts	2400*105mm
120lm/w	9600lm
130lm/w	10400lm





Eco Seam LED Linear Light

DIP switch power (0.6m: 15w/18w/20w, 1.2m: 25w/32w/40w, 2.4m: 52w/63w/80w)

DIP switch CCT: (3000K/4000K/5000K or 4000K/5000K/6000K)


Instant seamless connection

Light Direction: Light up and down / Light down

High Efficacy: 130lm/w $\pm 10\%$, up to 140lm/w $\pm 10\%$

Suspended / Surface Mount / Wall mount installation

Material: Black painted 6063# Aluminum housing (White painted optional)

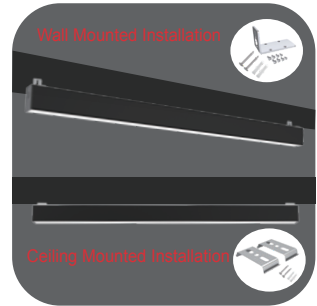

SL-LS50X2-20-X	
20 Watts	600*50*70mm
130lm/w	2600lm
140lm/w	2800lm

SL-LS50X4-40-X	
40 Watts	1200*50*70mm
130lm/w	5200lm
140lm/w	5600lm

SL-LS50X8-80-X	
80 Watts	2400*105mm
130lm/w	10400lm
140lm/w	11200lm



Smart Multicolour LED Tube Light

High Efficacy: 120lm/w \pm 10%



Linkable Option Available

Metal Base: Black or Silver option

Adjustable Color Temperature and Brightness

CCT Tunable (2200K-6500K) or CCT Tunable + RGB Option

With The TUYA Smart Home APP, support biological rhythm, musical rhythm

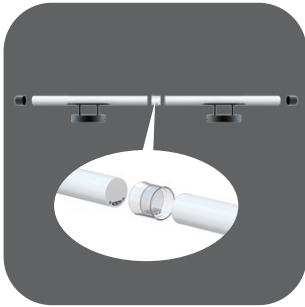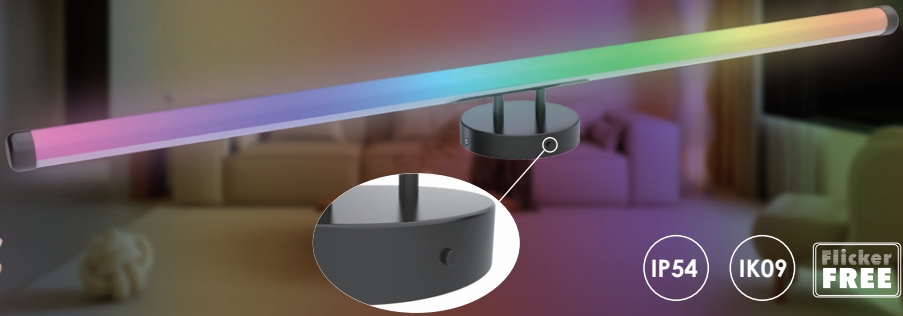

SL-C40BF2-15-D

15 Watts 600*105mm
120lm/w 1800lm



SL-C40BF4-30-D

30 Watts 1500*105mm
120lm/w 3600lm



SL-C40BF3-22-D

22 Watts 900*105mm
120lm/w 2640lm


SL-C40BF5-40-D

40 Watts 1500*105mm
120lm/w 4800lm



Protac Explosion-proof Light

ATEX Quick Connector
 High-strength PC Dual Color Housing
 Endcap: PA66 + Fibreglass
 ENEC Certified Flicker Free Driver, THD<15%

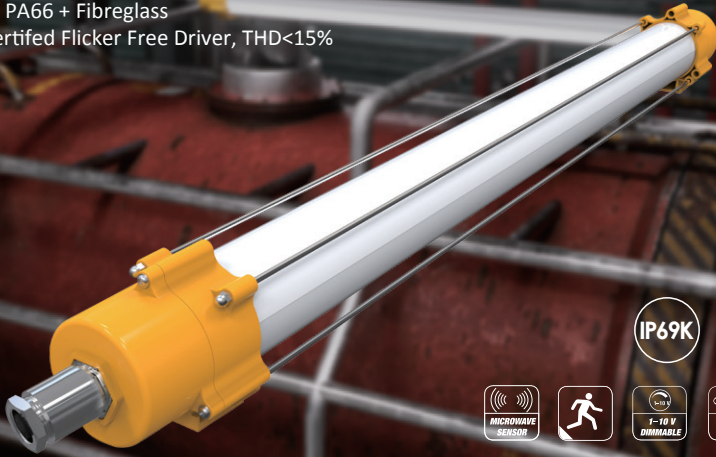

IP69K

IP66

IK10



SL-P69X2-20-YD

20 Watts 600*Ø76mm/2Ft
 150lm/w 3000lm



SL-P69X3-30-YD

30 Watts 1200*Ø76mm/3Ft
 150lm/w 4500lm



SL-P69X4-36-YD

36 Watts 1500*Ø76mm/4Ft
 150lm/w 5400lm



Expert

T8 LED Tube

Auto-recover while incorrect input
 Aluminum housing + PC Cover
 ±90° rotatable end cap
 Up to 150lm/w
 Magnetic/ Electronical ballast compatible
 L80B10(Ta=25°C)>50,000hrs



SLR-T82X10-117-X

10 Watts	600mm
120lm/w	1200lm
150lm/w	1500lm




SLR-T84X18-234-X

18 Watts	1200mm
120lm/w	2160lm
150lm/w	2700lm




SLR-T84X20-234-X

20 Watts	1200mm
120lm/w	2400lm
150lm/w	3000lm

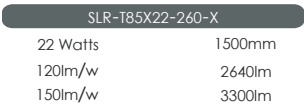


SLR-T85X22-260-X

22 Watts	1500mm
120lm/w	2640lm
150lm/w	3300lm

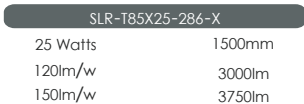

SLR-T85X25-286-X

25 Watts	1500mm
120lm/w	3000lm
150lm/w	3750lm

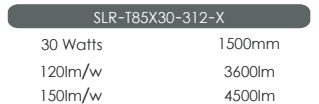

SLR-T85X30-312-X

30 Watts	1500mm
120lm/w	3600lm
150lm/w	4500lm



Expert

T8 LED Tube(CE)

Auto-recover while incorrect input
Aluminum housing + PC Cover
±90° rotatable end cap
Up to 180lm/w
Magnetic/ Electronical ballast compatible
L80B10(Ta=25°C)>50,000hrs




SLR-T82X08-168-X

8 Watts	600mm
160lm/w	1280lm
180lm/w	1440lm



SLR-T84X18-280-X


18 Watts	1200mm
160lm/w	2880lm
180lm/w	3240lm

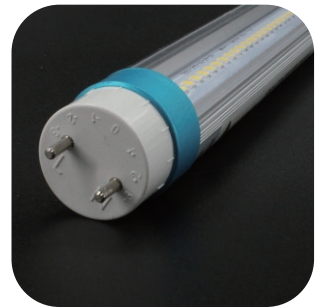

SLR-T85X25-336-X

25 Watts	1500mm
160lm/w	4000lm
180lm/w	4500lm



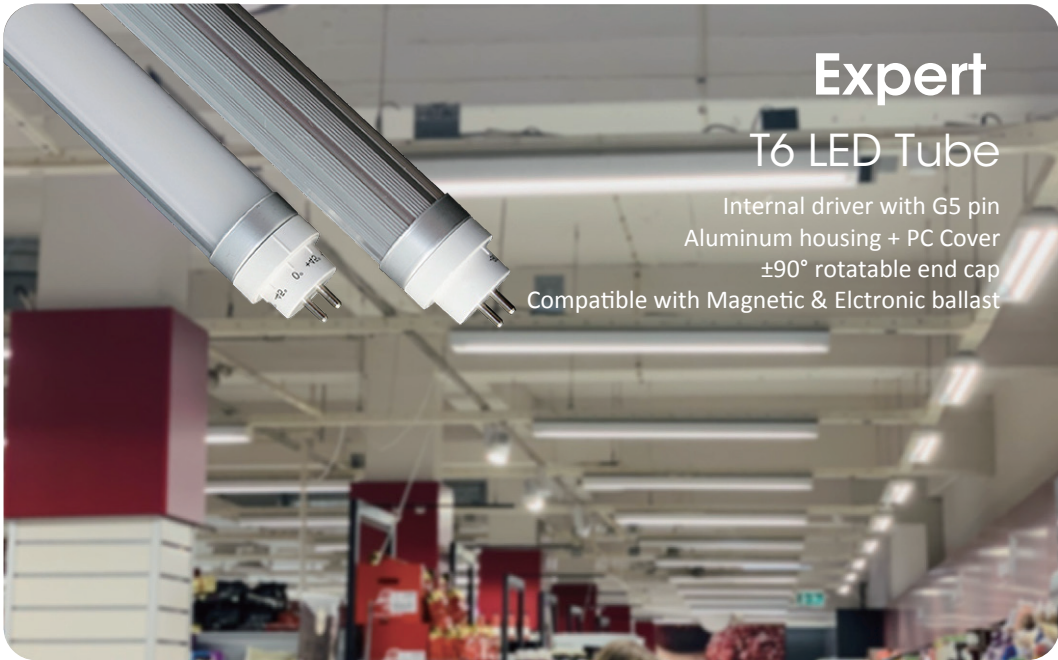

Expert


T6 LED Tube

Internal driver with G5 pin
 Aluminum housing + PC Cover
 ±90° rotatable end cap
 Compatible with Magnetic & Electronic ballast



SL-T62X10-108-X

10 Watts	549*Ø23.5mm
120lm/w	1200lm
150lm/w	1500lm

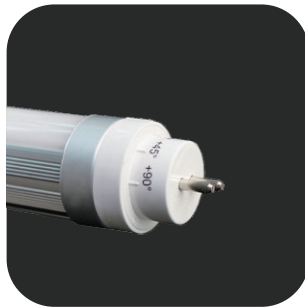

SL-T65X22-264-X

22 Watts	1449*Ø23.5mm
120lm/w	2640lm
150lm/w	3300lm



SL-T64X20-240-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm

SL-T65X25-288-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm




T5 Integrated LED Tube

Aluminum housing + PC Cover
 Integrated structure
 Internal drive
 Linkable / tool-free



SL-T52X-10-54-XT

10 Watts	60*23mm
120lm/w	1200lm
140lm/w	1400lm



SL-T53X-15-72-XT

15 Watts	90*23mm
120lm/w	1800lm
140lm/w	2100lm

SL-T54X-20-120-XT

20 Watts	120*23mm
120lm/w	2400lm
140lm/w	2800lm

SL-T55X-25-144-XT

25 Watts	150*23mm
120lm/w	3000lm
140lm/w	3500lm



Eco UFO Highbay Light

Lifting ring installation
 CE, RoHS certificate, IP65 waterproof
 High-quality Aluminum housing + Ultra-clear lens
 High Efficacy: 190lm/w \pm 10%,
 UGR<19: 160lm/w \pm 10%



SL-U65BX-60-XE-C

60 Watts Φ 285*H145mm
 160-190lm/w 9600~11400lm




SL-U65BX-100-XE-C

100 Watts Φ 285*H145mm
 160-190lm/w 16000~19000lm




SL-U65BX-120-XE-C

120 Watts Φ 345*H153mm
 160-190lm/w 19200~22600lm

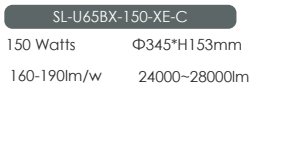


SL-U65BX-150-XE-C

150 Watts Φ 345*H153mm
 160-190lm/w 24000~28000lm

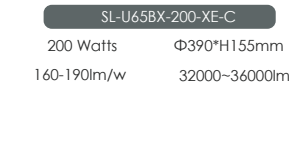

SL-U65BX-200-XE-C

200 Watts Φ 390*H155mm
 160-190lm/w 32000~36000lm

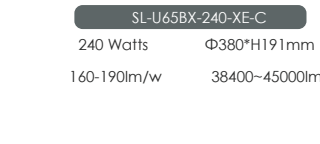

SL-U65BX-240-XE-C

240 Watts Φ 380*H191mm
 160-190lm/w 38400~45000lm



IP66 LED Flood Light



With Aluminum Rebreather
 Integrated design of housing and radiator
 Process of Aluminium diecasting + Tempered glass
 Lens: 90°(Standard), 30°/45°/60°/T2/T3 optional
 High Efficacy: 135lm/w \pm 10%, upto 200lm/w \pm 10%



SL-FL66BC-50-XE

50 Watts 300*222*54mm
 135lm/w 6750lm
 200lm/w 10000lm



SL-FL66BC-80-XE

80 Watts 315*273*56mm
 135lm/w 10800lm
 200lm/w 16000lm



SL-FL66BC-100-XE

100 Watts 367*280*56mm
 135lm/w 13500lm
 200lm/w 20000lm

SL-FL66BC-150-XE

150 Watts 402*337*61mm
 135lm/w 20250lm
 200lm/w 30000lm

SL-FL66BC-200-XE

200 Watts 453*337*61mm
 135lm/w 27000lm
 200lm/w 40000lm

SL-FL66BC-300-XE

300 Watts 483*455*61mm
 135lm/w 40500lm
 200lm/w 60000lm

SL-FL66BC-400-XE

400 Watts 560*498*61mm
 135lm/w 54000lm
 200lm/w 80000lm



High Power IP65 LED Flood Light




IP65, IK08 approved
 Large heat dissipation area
 With Aluminum Rebreather
 Integrated design of housing and radiator
 Process of Aluminium diecasting + PC Lens
 Lens: 90°(Standard), 30°/60°/P6 optional



SL-FL65BD-750-XE
 500 Watts

140lm/w 70000lm

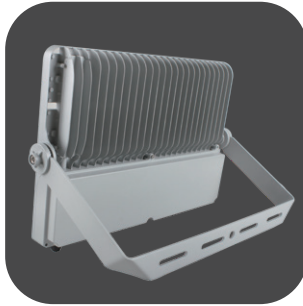

SL-FL65BD-750-XE
 750 Watts

140lm/w 105000lm



SL-FL65BD-1000-XE
 1000 Watts

140lm/w 140000lm



IP66 LED Street Light

CE, RoHS standard, IP66 waterproof
 Integrated die cast aluminum housing
 10 in 1 speciality anti glare TS2 len
 Anti surge impulse voltage 20k
 Efficacy: 180lm/w
 Adjustable installation angl
 High-quality aluminum housing + tempered glas



SL-ST66GC-50-XE

50 Watts


180lm/w 9000lm



SL-ST66GC-75-XE

75 Watts

180lm/w 13500lm



SL-ST66GC-100-XE

100 Watts

180lm/w 18000lm

SL-ST66GC-150-XE

150 Watts

180lm/w 27000lm

SL-ST66GC-200-XE

200 Watts

180lm/w 36000lm

SL-ST66GC-250-XE


250 Watts

180lm/w 45000lm




Arealux Stadium Light

IP65 & IK10 Grading
 Thunder&Surge protection
 Strong thermal conductivity
 High heat dissipation efficiency
 Lens angle: 60°/20°
 Customizable lens angles: 90°/40°/30°/10°

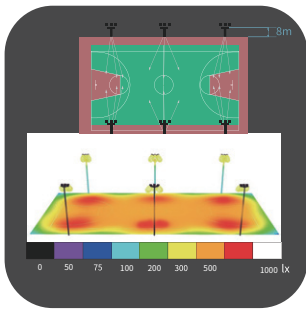


SL-0200-D60
 200 Watts

120lm/w 24000lm



SL-0400-D60
 400 Watts

120lm/w 48000lm

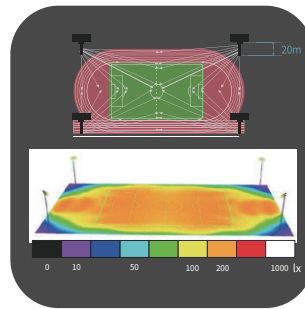

SL-0600-D20
 600 Watts

120lm/w 72000lm

SL-0800-D20
 800 Watts

120lm/w 96000lm

SL-1200-D20
 1200 Watts


120lm/w 144000lm



Smart Control System

Memory function

IP65 rating
 Single lamp control or multi-group control
 Dimming & CCT spectrum control for Timing setting
 Support 0-10V,PWM dimming power supply
 Sunrise and sunset lighting mode Simulation

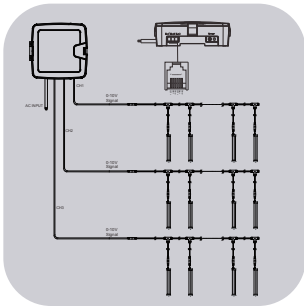

SL-IFC1000

240*240*80mm (9.45*9.45*3.15 inch)

AC100-240V / 0.1-1A

Output Requirement: PWM/0-10V

Standby Power <1Watt






Alpha Vapor Tight



Parkade IP65 Alu Tri-proof




Rancher IP69K Tri-proof

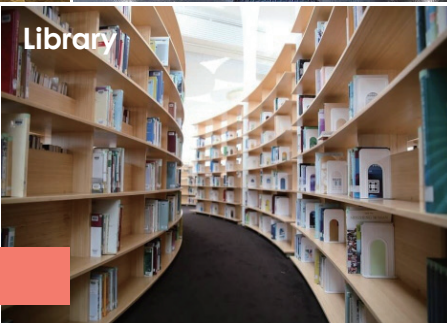

LED Panel Light



LED Tube Light

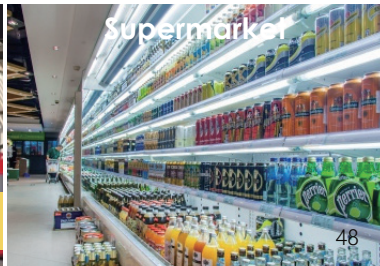



Quality Defender Original Designer

SHINELONG TECHNOLOGY CORP., LTD.

✉ sales@shinelongled.com

☎ +86-755-8520 3899

📱 [shinelongled](https://www.shinelongled.com)

🏠 www.shinelongled.com

📍 A901, B902, BLDG. 4, Baolong Intelligent Industry Park, Xinnengyuan 1 Rd, Baolong, Longgang District, Shenzhen, China. 518116



Scan me get updates